


**FREESTONE**

Freestone | Ebony exposed aggregate with bullnose cap

**1800 191 131**  
**australianpaving.com.au**



## Typical freestone ECO retaining wall. System low height gravity wall section

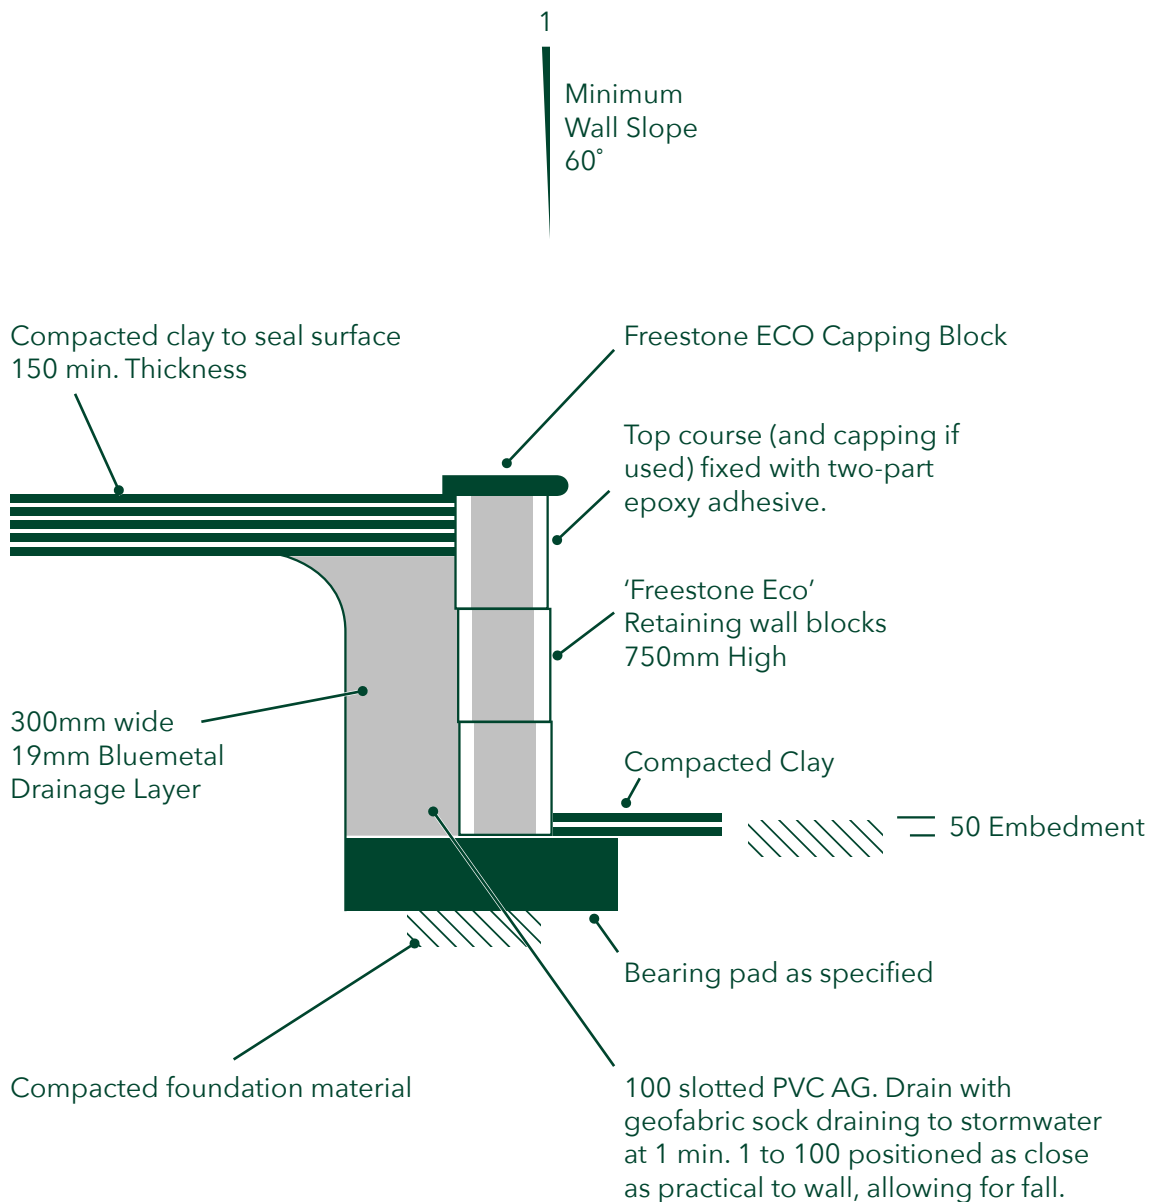


# FREESTONE

Typically use a 300mm wide bullnose capping block for the step thread


Typically a 150-175mm step rise is preferred, max step height per the B.C.A is 190mm

Freestone ECO capping block fixed with either landscape liquid nails or 2 part epoxy

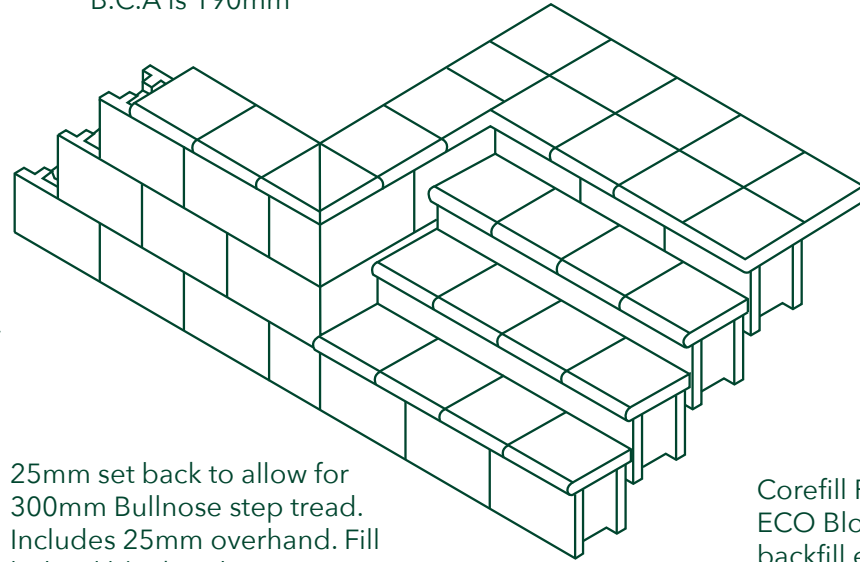

25mm set back to allow for 300mm Bullnose step tread. Includes 25mm overhand. Fill behind block with concrete

Corefill Freestone ECO Blocks backfill each step with concrete

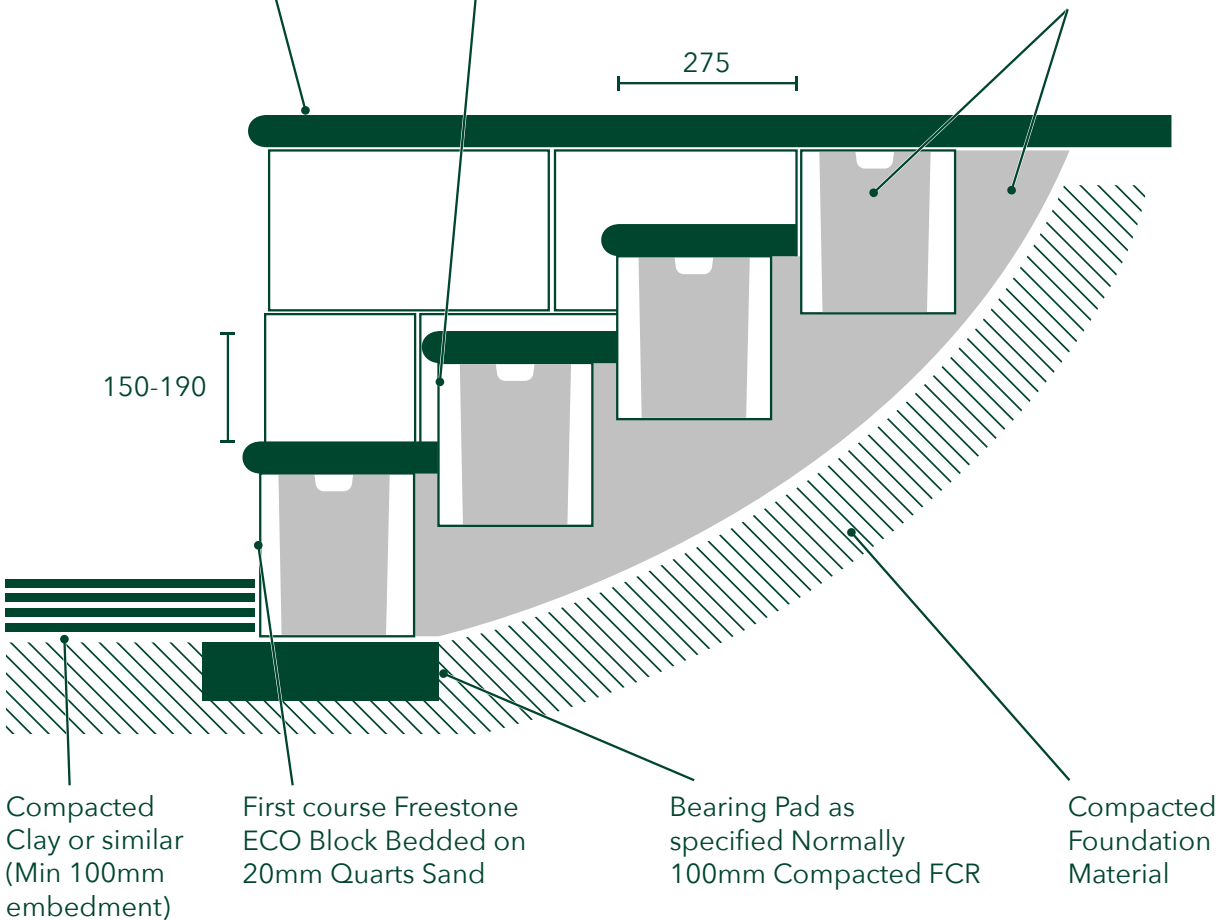

Compacted Clay or similar (Min 100mm embedment)

First course Freestone ECO Block Bedded on 20mm Quarts Sand

Bearing Pad as specified Normally 100mm Compacted FCR

Compacted Foundation Material



## Features

- Prestige and quality
- DIY vertical blocks
- Smooth or exposed surface finish
- No concrete footings
- Eco friendly - 40% recycled material

## Suitable for

- Retaining walls
- Garden walls
- Fences
- Garden seats
- Sun lounges
- Steps

## Colours\*

Ebony



Walnut



Mist



Limestone



## Textures\*

Smooth



Exposed aggregate



Freestone | Smooth Mist

## Sizes

### Block sizes

Block 400w x 250h x 240d

Corner 440w x 250h x 240d

### Cap sizes

Bullnose 300 x 300 x 50mm

Square cap 400 x 300 x 50mm

\*Colours and textures are an indication only and may differ